


TP-LINK

- Conecte o cabo UTP (Ultraset) na porta WAN do roteador:




CONFIGURAÇÃO DO ROTEADOR TP-LINK

1 – Após acessar o equipamento através do navegador, uma tela de Login será apresentada. Por padrão da marca, o “Login” ou “User Name” é “admin”, e a “Senha” ou “Password” é “admin”. Caso não funcione com esses dados, consulte o manual do seu equipamento para obter os padrões de acesso.

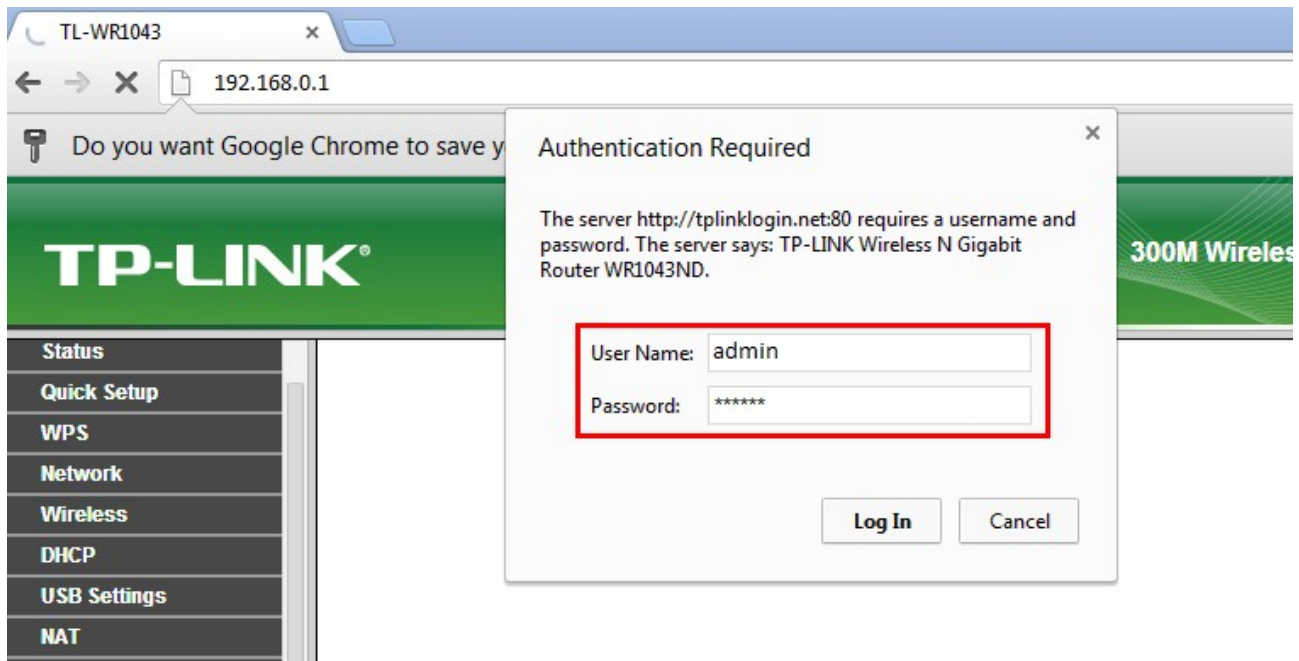

2 – Ao lado esquerdo, clique na opção “Quick Setup”, “Configuração Rápida” ou “Passo a Passo”. Após, clique em “Next”, “Próximo” ou “Seguinte”, conforme mostra a imagem:

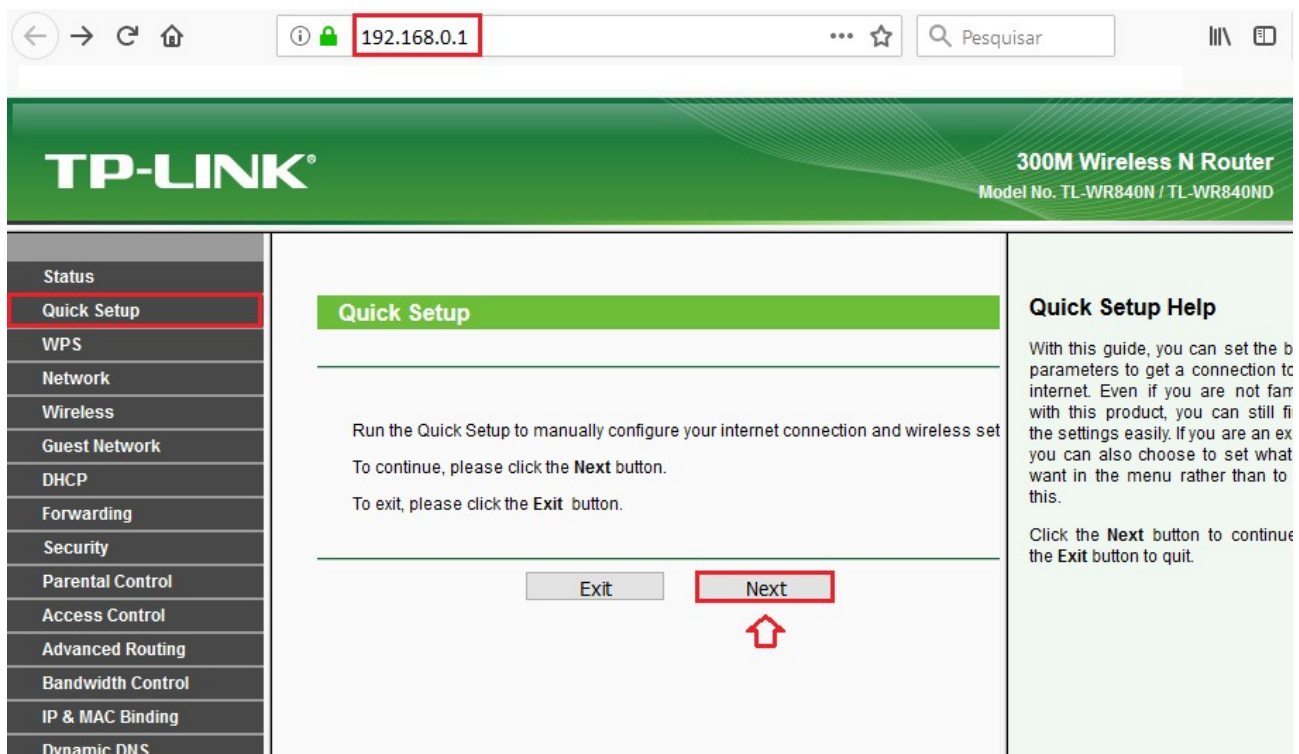

3 – Selecione o tipo de conexão “PPPoE” ou “PPPoE/Russian PPPoE” e clique em “Next”, “Próximo” ou “Seguinte”.

TP-LINK® 300M Wireless N Router
Model No. TL-WR840N / TL-WR840ND

Status
Quick Setup
WPS
Network
Wireless
Guest Network
DHCP
Forwarding
Security
Parental Control
Access Control
Advanced Routing
Bandwidth Control
IP & MAC Binding
Dynamic DNS
System Tools
Logout

Quick Setup - WAN Connection Type

The Quick Setup is preparing to set up your internet connection, please choose one type below according to your ISP. The detailed description will be displayed after you choose the corresponding type.

Auto-Detect
 Dynamic IP (Most Common Cases)
 Static IP
 PPPoE/Russian PPPoE
You have DSL connection and are connecting via PPPoE (Broadband Connection) on your computer or existing router.
 L2TP/Russian L2TP
 PPTP/Russian PPTP

Note: For users in some areas (such as Russia, Ukraine etc.), please contact your ISP to choose connection type manually.

Back Next

WAN Connection Type Help

The Quick Setup supports five popular types of connection. To make sure the connection type your ISP provides, please contact your ISP.

Auto Detect - If you don't know the connection type your ISP provides, use this option to allow the Quick Setup to search your Internet connection for servers and protocols and determine your ISP configuration. Make sure the cable is securely plugged into the WAN port before detection. The appropriate configuration page will be displayed when an active Internet service is successfully detected by the Router.

Dynamic IP - For Cable/DSL connection or connection behind a router which makes your computer immediately online without any setting or signing-in.

Static IP - Your ISP provides you

4 – Nesta tela, digite o nome do usuário no campo “User Name” ou “Nome de Usuário” seguindo o padrão “usuario@ultranet.com.br”. No campo “Password” ou “Senha”, digite a senha para o usuário. Confirme a senha no campo redigitando-a abaixo e clique no campo marcado (“Next”). Caso o assinante não possua essas informações, deverá entrar em contato com o suporte técnico para solicitar (11) 3544-4444.

TP-LINK® 300M Wireless N Router
Model No. TL-WR840N / TL-WR840ND

Status
Quick Setup
WPS
Network
Wireless
Guest Network
DHCP
Forwarding
Security
Parental Control
Access Control
Advanced Routing
Bandwidth Control
IP & MAC Binding
Dynamic DNS
System Tools
Logout

Quick Setup - PPPoE

User Name:
Password:
Confirm Password:

Secondary Connection: Disabled Dynamic IP Static IP (For Dual)

Back Next

PPPoE Help

User Name and Password - Enter the User Name and Password provided by your ISP. These fields are case-sensitive.

Secondary Connection
Secondary Connection - It is available only for PPPoE Connection. If your ISP provides an extra Connection type such as Dynamic/Static IP to connect to a local area network, then you can check the radio button of Dynamic/Static IP to activate this secondary connection.

- Disabled** - The Secondary Connection is disabled by default, so there is PPPoE connection only. This is recommended.
- Dynamic IP** - Use dynamic IP address to connect to the local area network provided by ISP.

5. Nesta etapa, é preciso setar as configurações da rede sem fio. No campo “Wireless Network Name”, “Nome da Rede Sem Fio” ou “SSID”, digite o nome que o usuário deseja manter para a rede. Digite a senha do wifi no campo “Wireless Password” ou “Senha de Rede Sem Fio”. Ao final das alterações, clique em “Next” ou “Próximo”.

Quick Setup - Wireless

The Internet settings have been completed, now please configure the wireless settings

Wireless Radio:

Wireless Network Name: (Also called the SSID)

Region:

Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.

Wireless Security:

Disable Security

WPA-PSK/WPA2-PSK

Wireless Password: (You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 16 and 63)

No Change (use the current security settings.)


More Advanced Wireless Settings

NOTA***

1. Ao final das configurações, o roteador será reiniciado. Caso esteja configurando seu roteador utilizando a rede sem fio, seu dispositivo será desconectado automaticamente. É necessário realizar uma nova conexão selecionando o nome novo da rede.

2. Dê preferência para senhas conforme recomendado pelo roteador (AES / WPA2-PSK). Para sua segurança, mantenha a senha num padrão com letras maiúsculas, minúsculas e números.

6 – Conclua o procedimento clicando em “Finish” ou “Finalizar”.

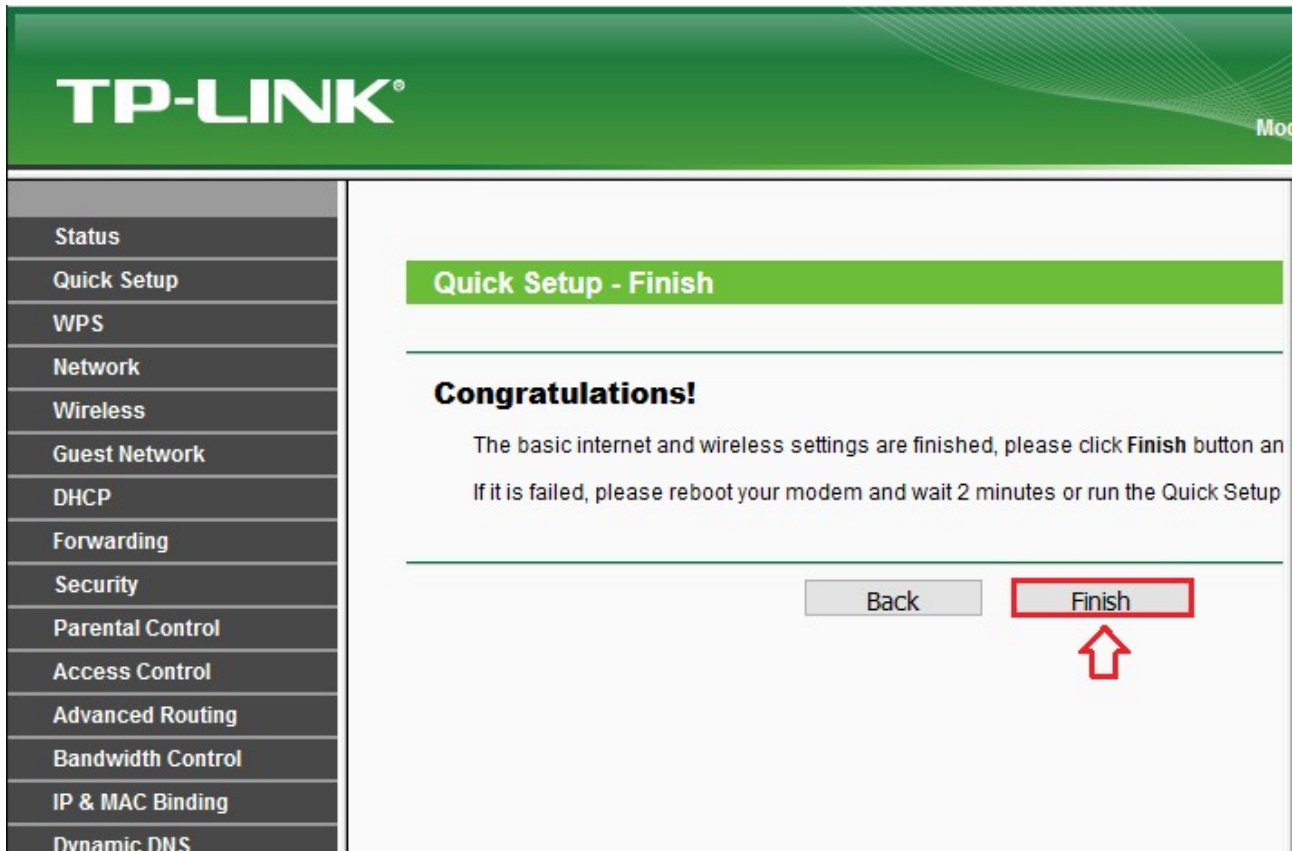

TP-LINK®

Mod

Status

Quick Setup

WPS

Network

Wireless

Guest Network

DHCP

Forwarding

Security

Parental Control

Access Control

Advanced Routing

Bandwidth Control

IP & MAC Binding

Dynamic DNS

Quick Setup - Finish

Congratulations!

The basic internet and wireless settings are finished, please click **Finish** button and
If it is failed, please reboot your modem and wait 2 minutes or run the Quick Setup

Back Finish

↑

NOTA***

Para um acompanhamento mais específico, consulte no site:
<http://www.tp-link.com.br/emulators.html>